


DATA SHEET ~ TECO MAXe3™ PREMIUM SEVERE DUTY - MEPS HIGH EFFICIENCY	
Type	Squirrel Cage Induction Motor ~ TEFC
Input Supply	415Volts 50Hz 3 Phase
Degree of Protection	IP66 Complete with Porous Drain Plugs
Mounting Arrangments	IM1001 B3 / IM3001 B5 / IM2001 B35
Cooling Class	IC411
Insulation	Class 'F' 155°C
Temperature Rise	≤80°C
Ambient Condition	40°C (TECO can accept up to 55°C ambient as standard)
Altitude	Less than 1000 Metres above sea level
Application	Vee Belt Drive or Direct Coupled
Starting Method	DOL, Soft Starter or VVVF Duty (Subject to load demand)
Service Factor	1.0 p.u @ Class B Temp. rise - 1.15 p.u @ Class F Temp. rise
Rotation	Bi Directional - Low Noise
Bearing Type & Arrangement	Oversize Series Anti Fiction - Ball / Ball Arrangement
Terminal Box Type & Rating	Oversized Cast Iron Construction - IP66 rating
kW Rating	15
Pole	6
Full Load Speed (Rpm)	970
Frame Size	180LC
Efficiency @ 100% Loading	92.0
Efficiency @ 75% Loading	92.0
Efficiency @ 50% Loading	92.0
Power Factor @ 100% Loading	84.0
Power Factor @ 75% Loading	81.0
Power Factor @ 50% Loading	72.5
Full Load Current (Amps)	27.00
Starting Current in % (DOL)	630
Starting Current (Amps) (DOL)	170.0
Full Load Torque (Nm)	147.00
Locked Rotor Torque (DOL) (% of Full Load Torque)	253
Pull Up Torque (DOL) (% of Full Load Torque)	182
Breakdown Torque (% of Full Load Torque)	275
Rotor Inertia in $GD^2/4$ (kG-M ²)	0.3355
Maximum Inertia in $GD^2/4$ (kG-M ²)	15.9000
Noise Pressure Level @ 1 Metre No Load (dBA)	56
Approx. Weight (kg)	205

DOL Torque versus Speed & Current Curve



Efficiency & Power Factor Load Curve

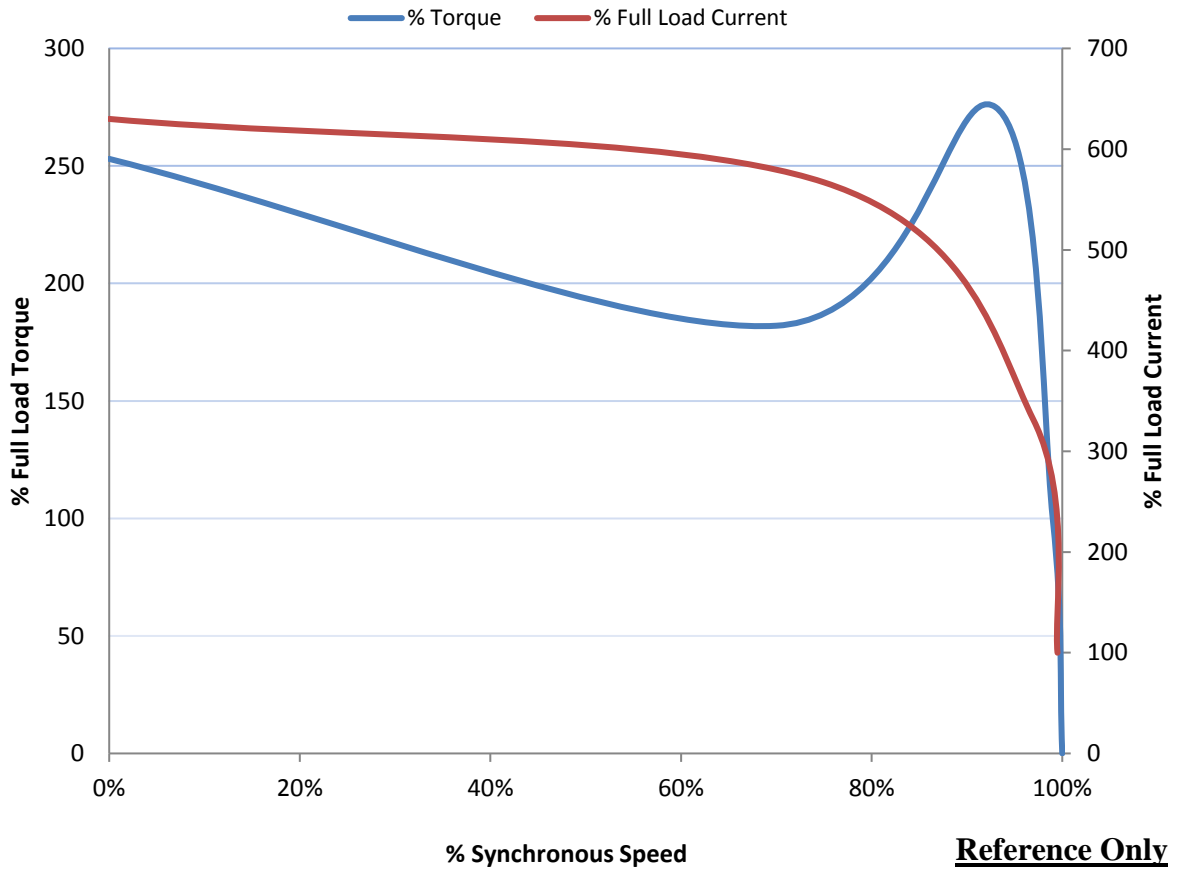