



OUTLINE DIMENSIONS 3-PHASE INDUCTION MOTOR

FRAME NO :

D80

POLES

KW

HP

SYNCH RPM

2

0.75, 1.1

1, 1.5

3000


4

0.75

1

1500

Totally Enclosed Fan-Cooled Type, Squirrel-Cage Rotor.

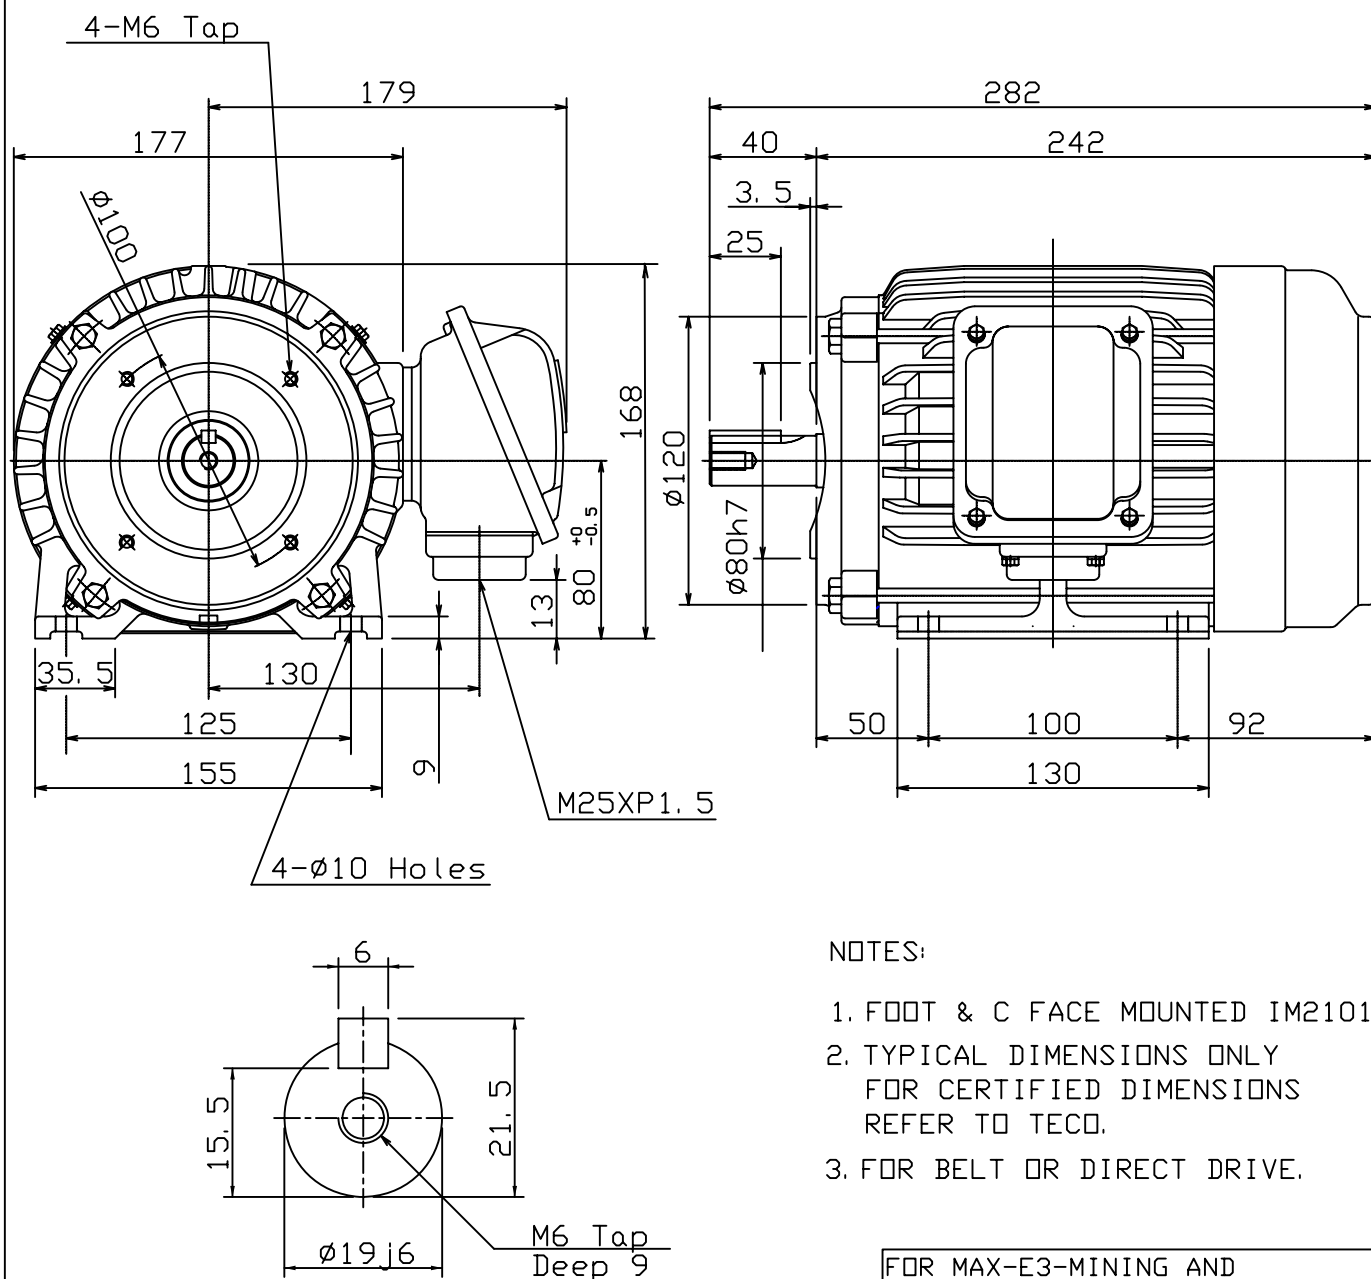

NOTES:

1. FOOT & C FACE MOUNTED IM2101.
2. TYPICAL DIMENSIONS ONLY
FOR CERTIFIED DIMENSIONS
REFER TO TECO.
3. FOR BELT OR DIRECT DRIVE.

FOR MAX-E3-MINING AND
AND MAX-E3-PREMIUM SEVERE DUTY

DWN.	EJ	01. 12. 15
CHKD.	DK	01. 12. 15
APPD.	JF	01. 12. 15

東元電機股份有限公司
TECO ELEC. & MACH. CO., LTD.
TAIWAN R. O. C.

REV : 00