


Pole	HP	kW	Hz	VOLT	r/min
4	25	18.5	.	.	.

Ins	Rating	Dimension in	Approx Weight	Bearings
F	CONT.	mm		DE:6311ZZC3 NDE:6310ZZC3

Totally Enclosed Fan-Cooled Vertical Type, Squirrel-cage Rotor.

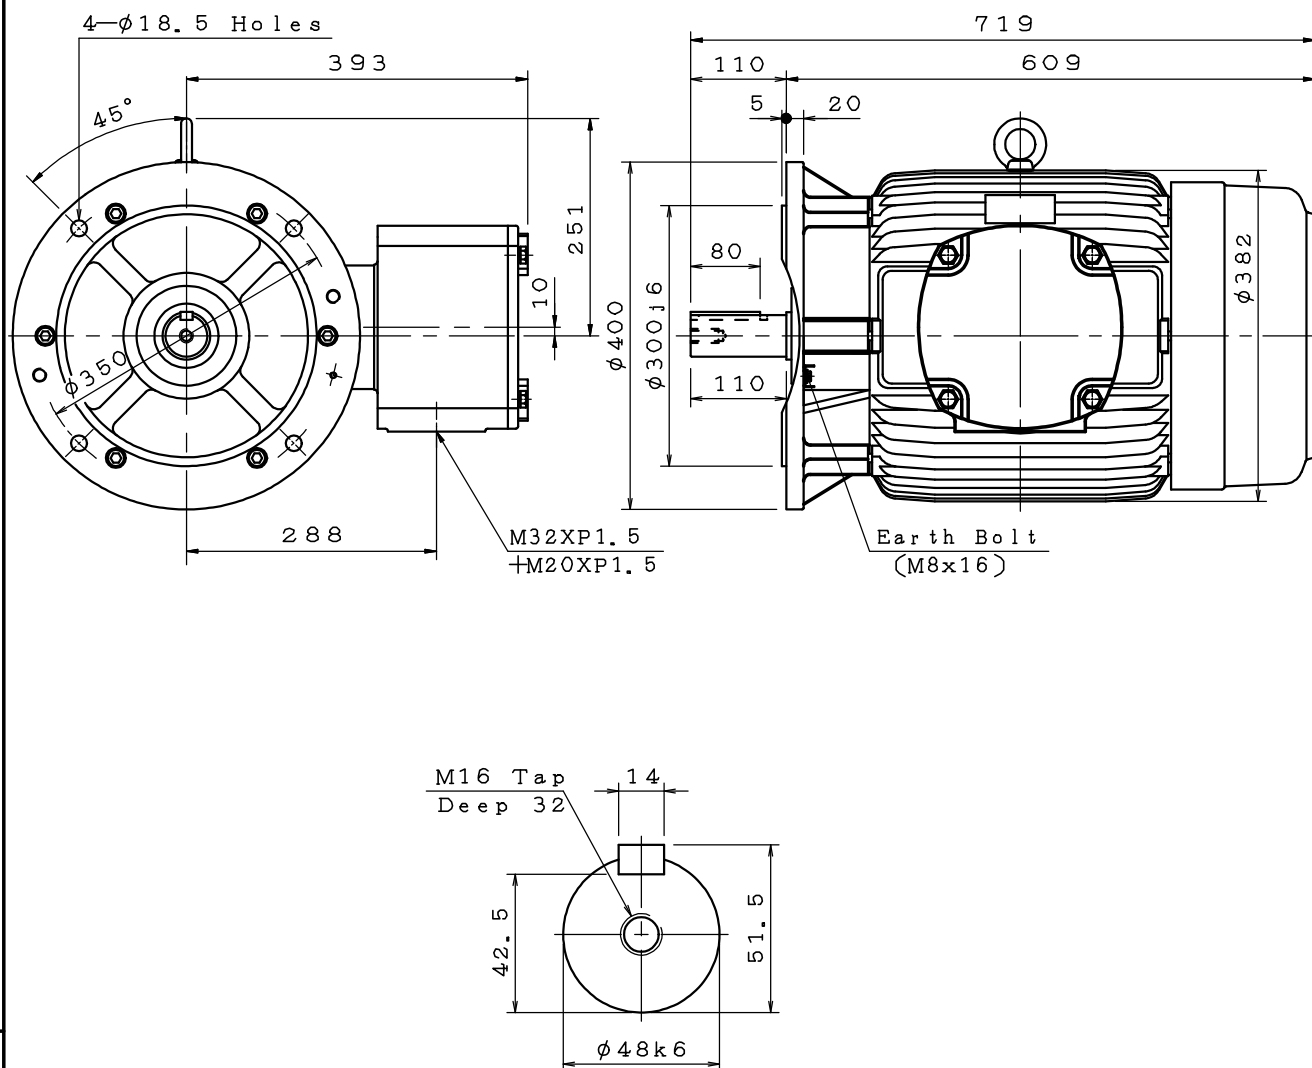

Note :

1. Ex db IIB T4 Gb & Ex db I Mb (IECEX/ATEX).
2. IP56 Protection.

KS21081-02

DWG.	陳奕元	11.03.21	東元電機股份有限公司 TECO Electric & Machinery Co., Ltd. TAIWAN	DWG NO.	31057M012470
CHKD.	陳奕元	11.03.21			
APPD.	徐聰豪	11.03.21			