TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN.SPEED R.P.M
	HP.	kW.					
AFJE-MC	300	220	6	CONT.	415	50	1000

TOTALLY ENCLOSED FAN-COOLED TYPE. SQUIRREL-CAGE ROTOR

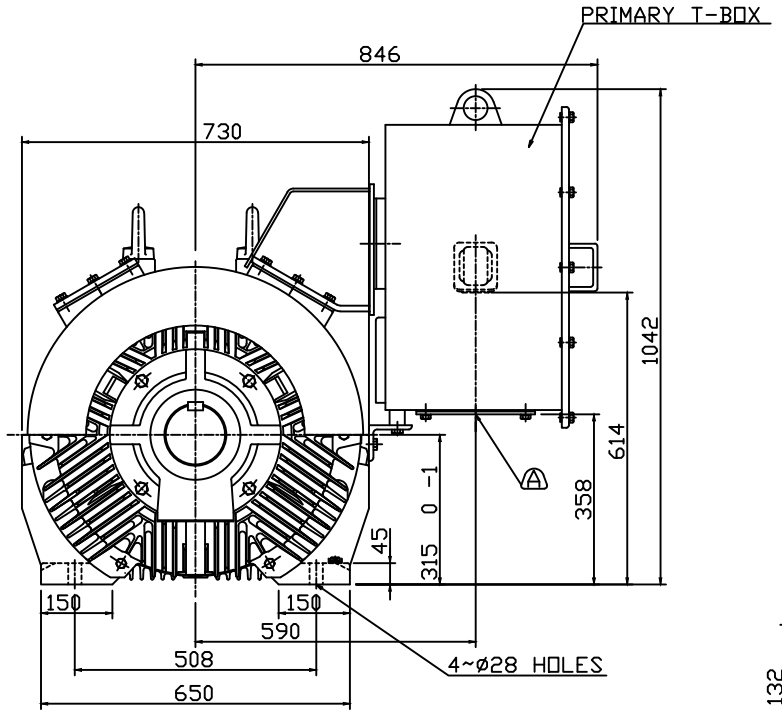

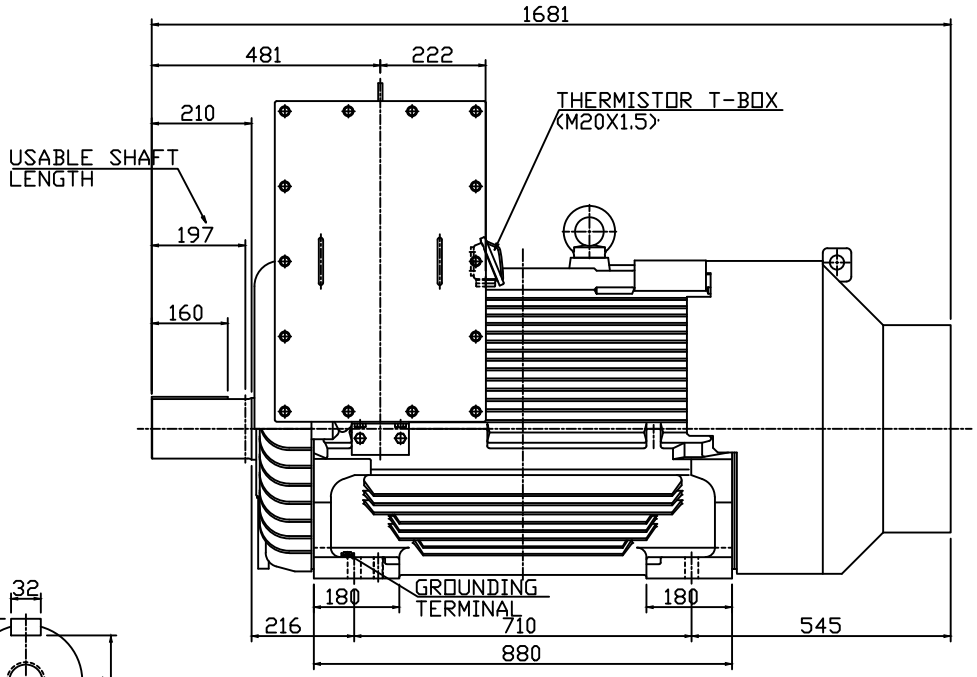

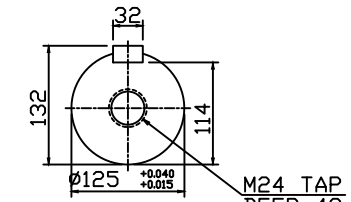

SHAFT END
(ENLARGED VIEW)

NOTE:
1. DIMENSIONS IN MM
2. FRAME NO. 315CC
3. H CLASS INSULATION
4. FOR BELT DRIVE
5. ENCLOSURE: IP66
6. BEARING SIZE: DRIVE-END NU326
   OPP. DRIVE-END 6220
7. WITH THERMISTOR: PTC 150°C 3PCS(ALARM)
   WITH THERMISTOR: PTC 160°C 3PCS(TRIP)
8. APPROX. WEIGHT: 1920 KGS

Ⓐ REMOVABLE COVER FOR MAIN LEAD ENTRY TO BE DRILLED BY CUSTOMER.

FOR MAXe3MINING

DWN.	EJ	01.12.2015
CHKD.	DK	01.12.2015
APPD.	JF	01.12.2015

TECO

東元電機股份有限公司
TECO Elec. & Mach. Co., Ltd.

OUTLINE DIMENSIONS
3-PHASE INDUCTION MOTOR

REV: 00