




OUTLINE DIMENSIONS  
3-PHASE INDUCTION MOTOR

FRAME NO :  
D280MC

POLES	HP	KW	SYNCH RPM
4	150	110	1500
6	100	75	1000
8	75	55	750

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

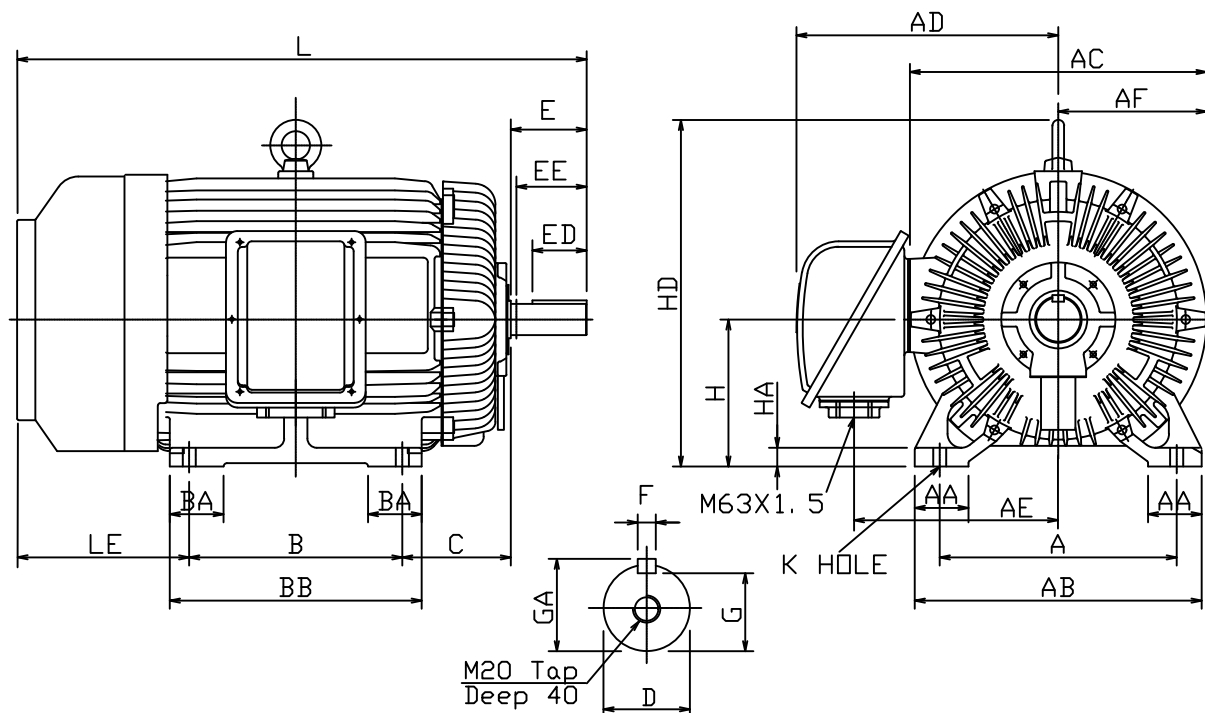

DIMENSIONS IN MM

FRAME NO.		A	AA	AB	AC	AD	AE	AF	B	BA	BB	C
280MC		457	110	560	603	600	445	293	419	130	495	190
D	E	ED	EE	F	G	GA	H	HA	HD	K	L	LE
80	170	140	157	22	71	85	280	36	651	24	1122	343

NOTES:

1. FOOT MOUNTED IM1001.
2. TYPICAL DIMENSIONS ONLY  
FOR CERTIFIED DIMENSIONS  
REFER TO TECO.
3. FOR BELT OR DIRECT DRIVE.

FOR MAXe3MINING AND  
AND MAXe3PREMIUM SEVERE DUTY

DWN.	EJ	01. 12. 15	東元電機股份有限公司 TECO ELEC. & MACH. CO., LTD. TAIWAN R. O. C.	REV : 00
CHKD.	DK	01. 12. 15		
APPD.	JF	01. 12. 15		